


EyeBeam Touch™

Technical Information



Technical Information

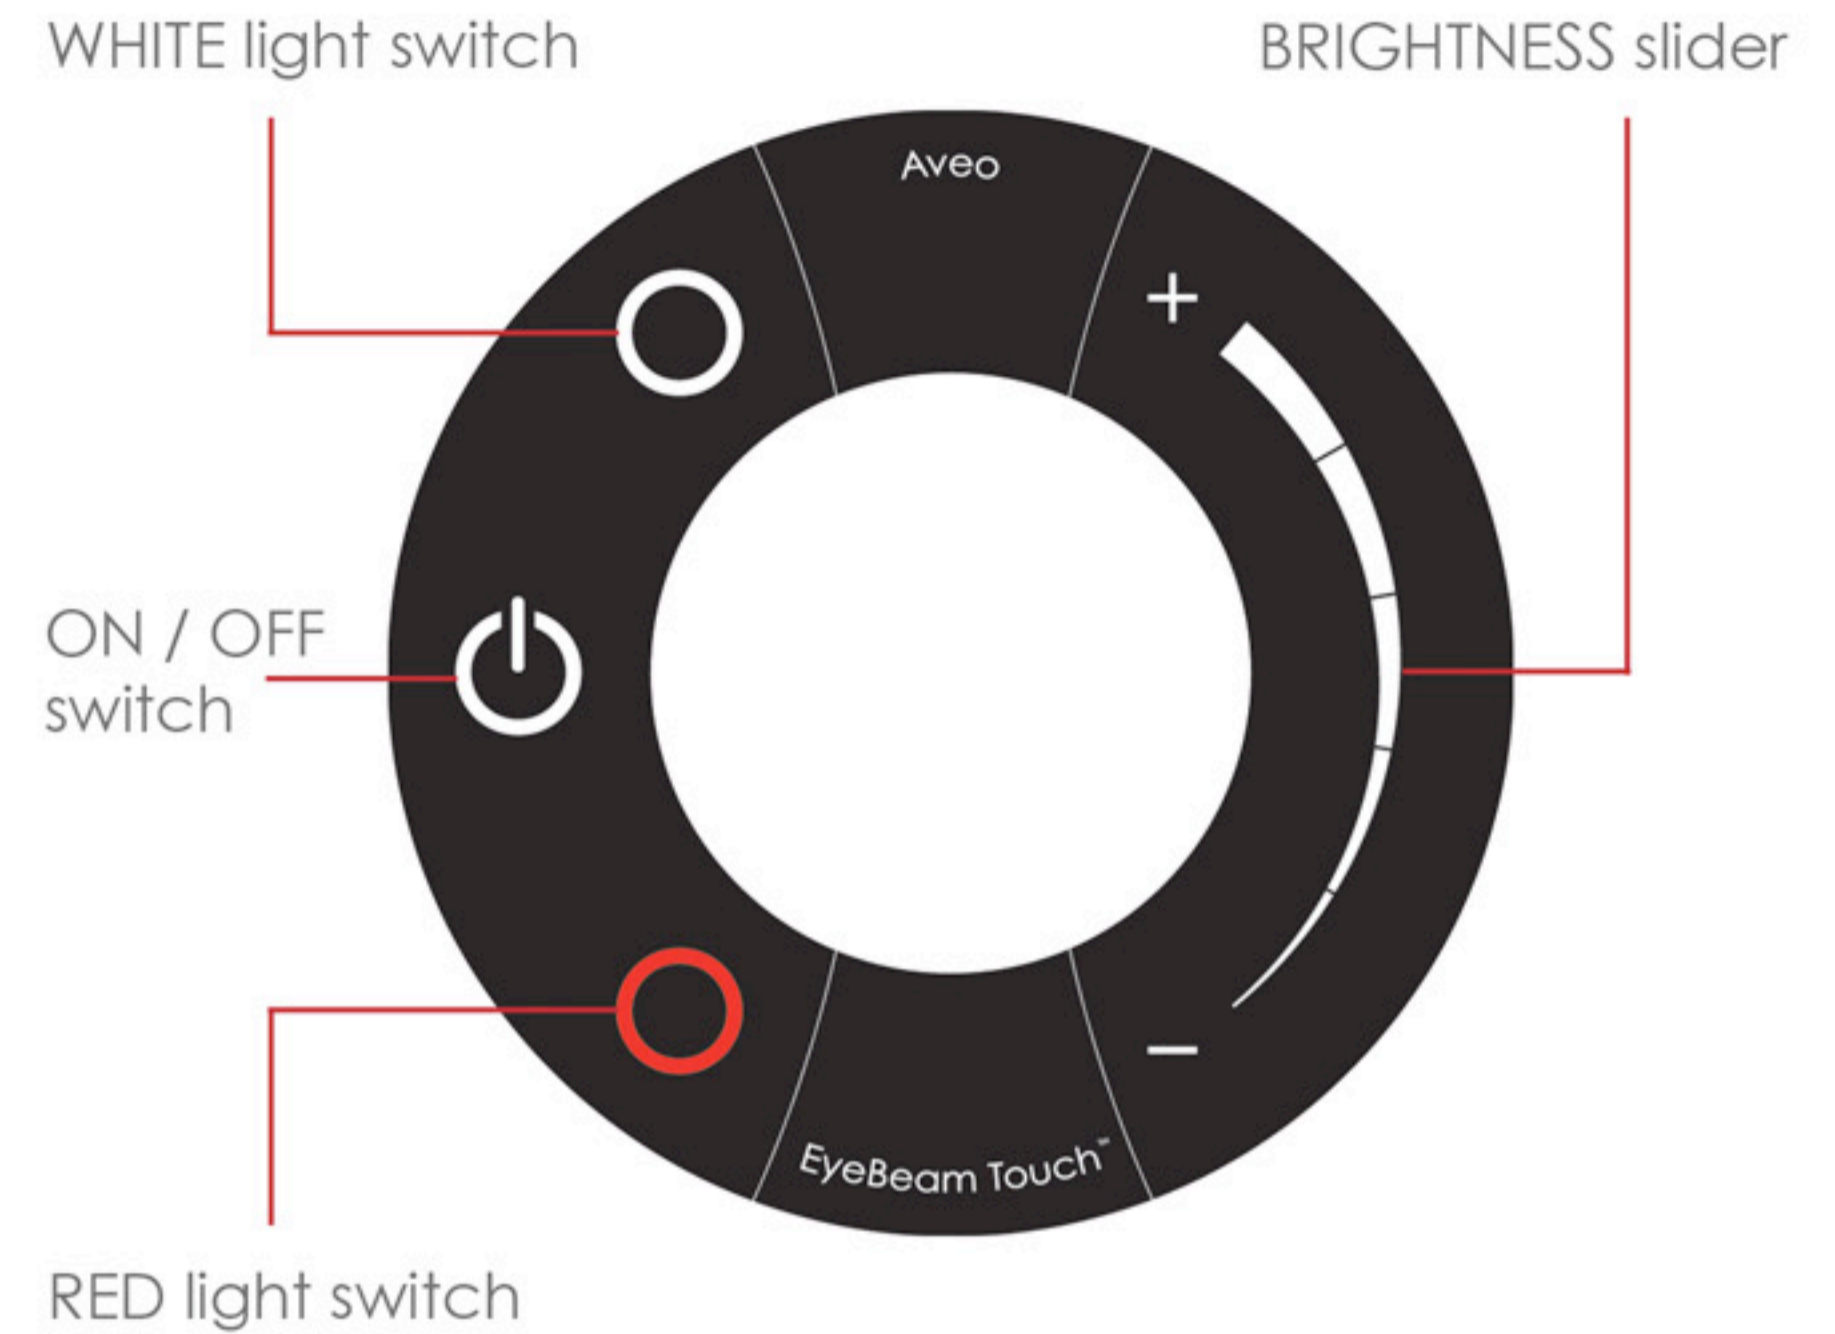

Power supply: 9-32 Volts

Current consumption: 110 mA @ 12 Volts

- Capacitive Sensing Interface with LED backlighting
- 9 Incremental steps capacitive sensing slide bar for brightness adjust
- 1 x Red LEDs
- 1 x White LEDs
- Swiveling Beam
- 2024 Anodized Aluminum Construction

Available options, sold separately:

- Replacement faceplates (Select from 3 colors of the faceplates: BLACK / WHITE / SILVER)
- Optional AveoRockRack™ LED laser engraved rocker switch

Adding Faceplates

1




Adding Faceplates

- 2 Remove paper cover from the adhesive foil




Adding Faceplates

3 Correct position of faceplate

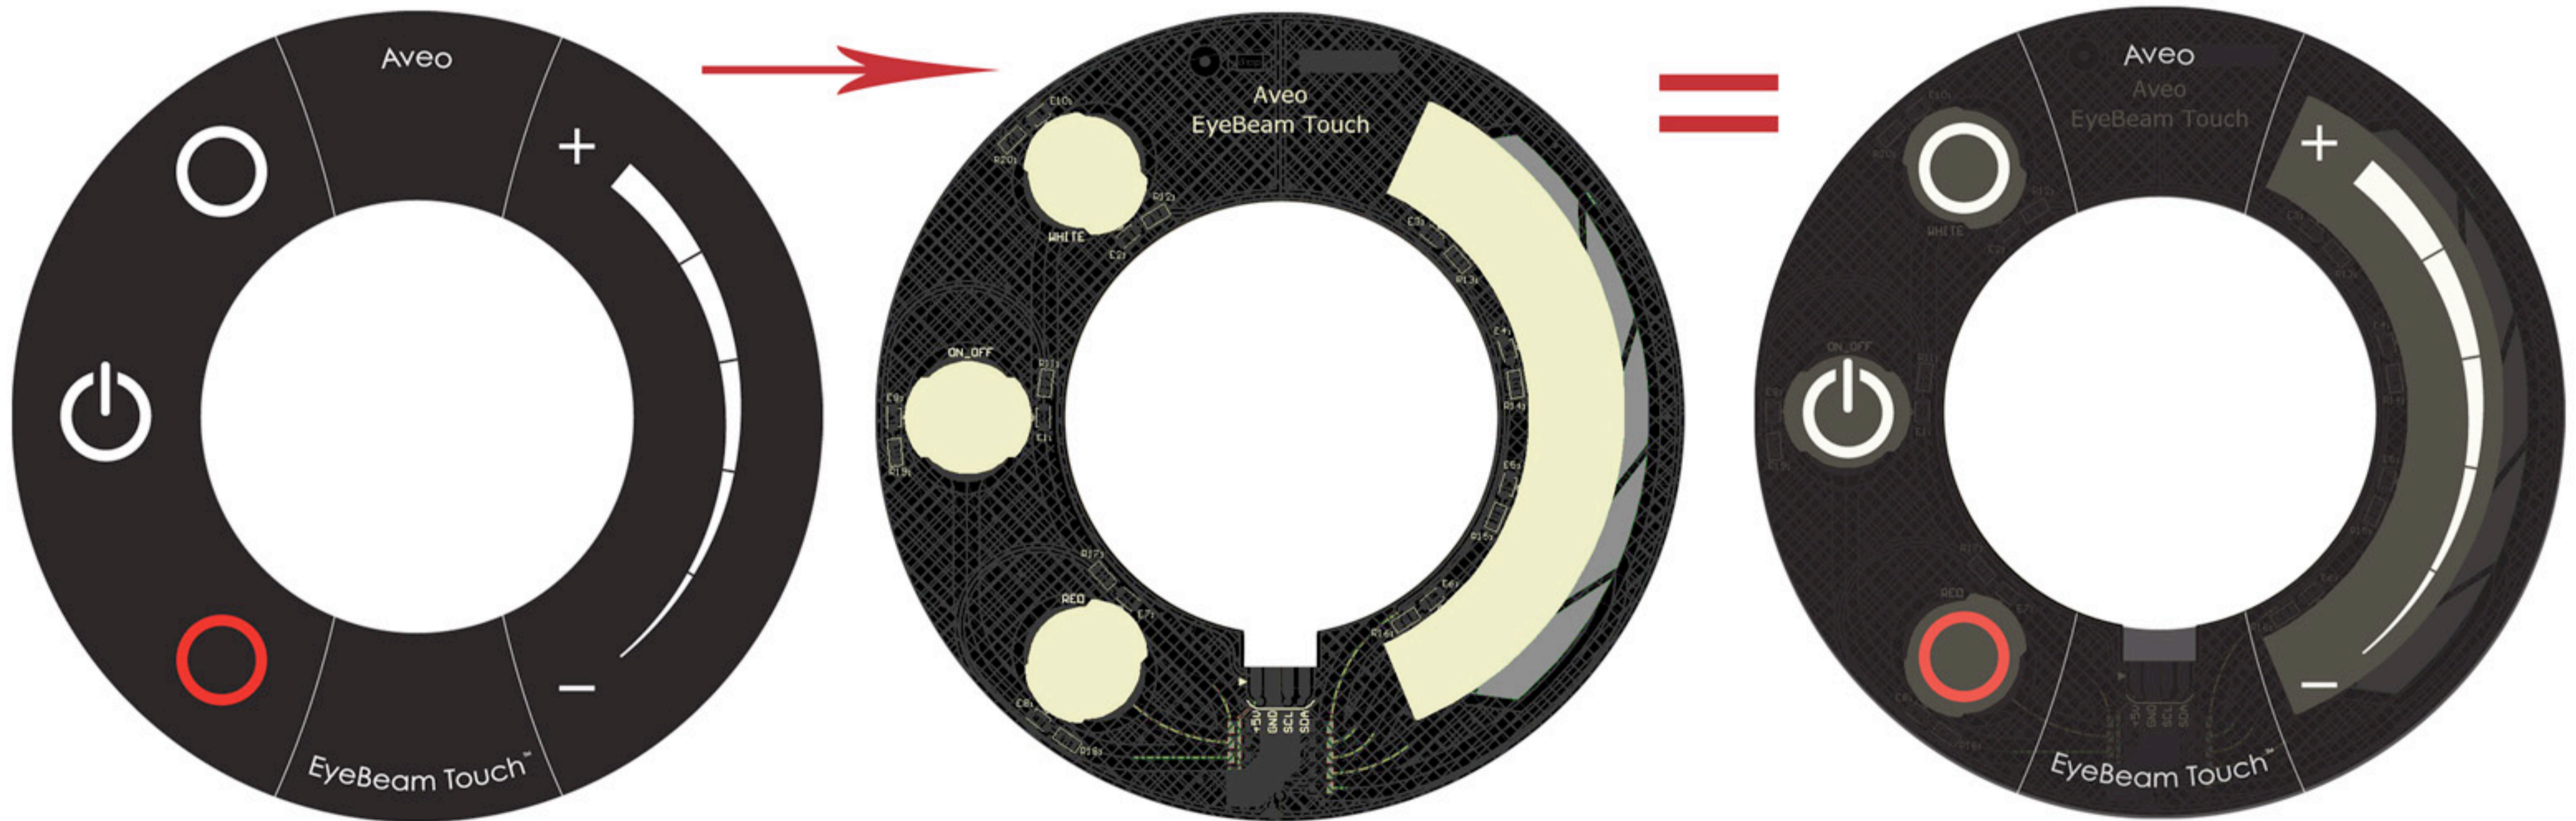

Adding Faceplates

- 4 Stick faceplate on the right position

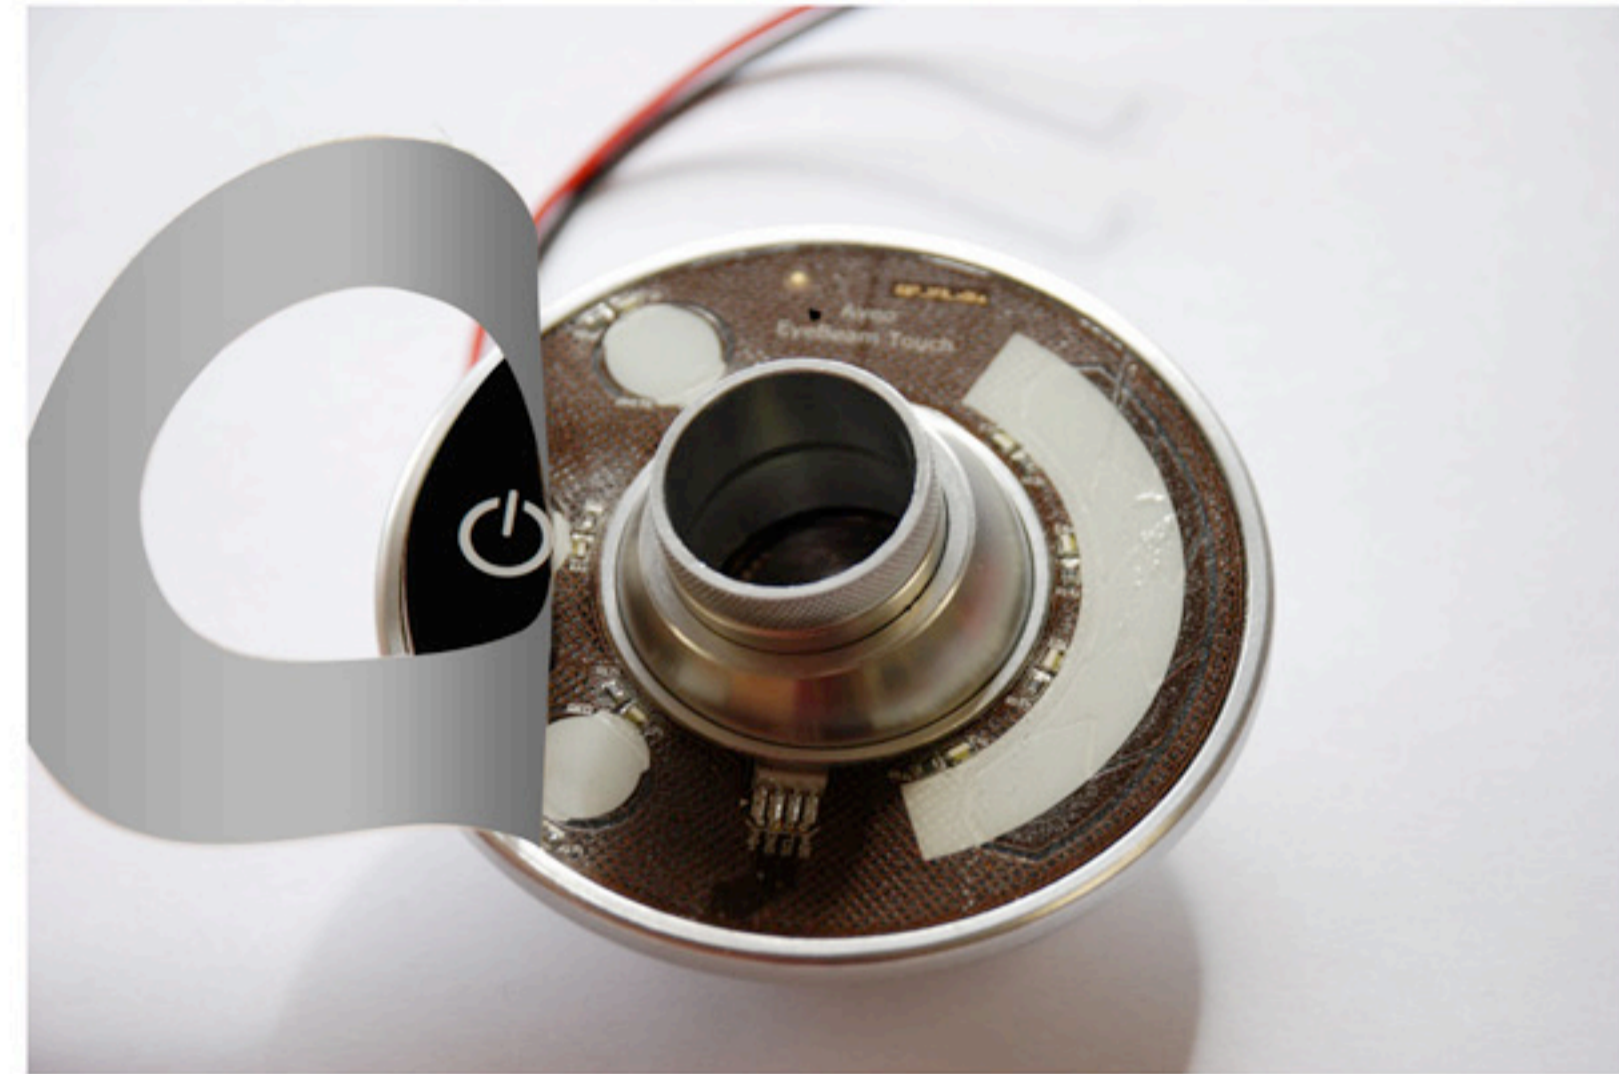

Wiring Diagram

