





## Drawing

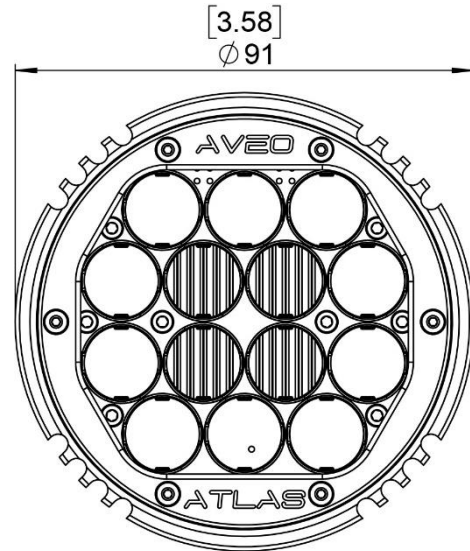

Dimensions in [inches] mm

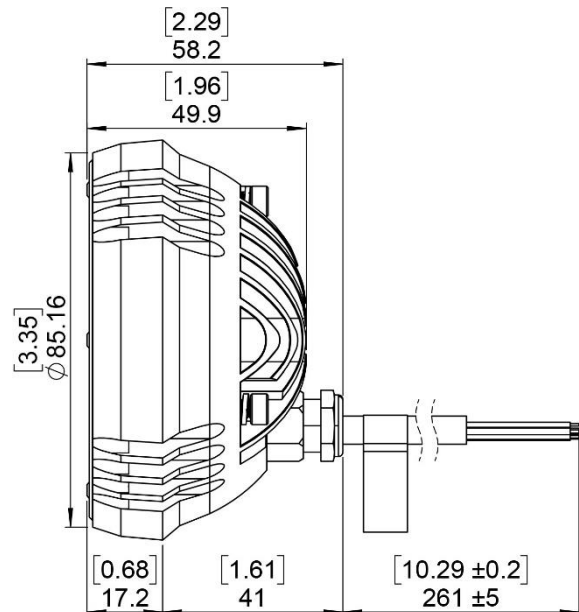

## Specification

Dimensions (mm):	91 mm x 49.9 mm
Dimensions (inches):	3.58" x 1.96"
Weight:	370 g / 13.05 oz
Operating Voltage Range:	9 – 36 V DC
Input Current (Landing):	2.70 A @14V 1.40 A @28V
Input Current (Taxi):	1.10 A @14V 0.55 A @28V
Input Power (Landing):	37.8 W @14V 39.2 W @28V
Input Power (Taxi):	15.4 W @14V 15.4 W @28V
Landing Lens Angle:	9°
Taxi Lens:	12° x 30°
Intensity (Landing):	123,000 cd (H) / 60,800 cd (L)
Intensity (Taxi):	10,700 cd (H) / 5,390 cd (L)
Intensity (Both):	134,000 cd (H) / 64,900 cd (L)
Ambient Temperature:	from -55°C to +85°C from -67°F to +185°F
Overheat Protection:	Yes (temperature dependent decrement of intensity, see note below)
Transient Voltage:	80 V max
Over-Voltage Lockout:	36 V DC
Reverse Polarity Protection:	Yes
Useful Life:	Not less than 30,000 aircraft flight hours
Waterproof, Dust-proof, Vibration-proof:	Yes

**NOTE:** If the light heats up to the temperature of 85°C (+/-10%), the output drops linearly by up to 10 % from the nominal value until it cools down to 60°C (+/- 10%). As soon as the temperature of 60°C (+/- 10%) is achieved, the light operates at full power again.

In case, when in the process of cooling down the power supply is interrupted and the temperature is within the range of 60°C (+/- 10%) - 85°C (+/-10%), then after turning on, the light starts to operate at full power until its temperature rises to 85°C (+/-10%).

## Control & Power Inputs

---

<b>WIRE</b>	<b>FUNCTION</b>
RED (20 AWG)	Landing
YELLOW (20 AWG)	Taxi
BLACK (20 AWG)	GND
GREEN/YELLOW (20 AWG)	CHASSIS
WHITE (24 AWG)	Master/Slave
BLUE (24 AWG)	Synchro
VIOLET (24 AWG)	Hi/Lo
GREEN (24 AWG)	WigWag