

Pacifica I™


Underwing or under fuselage landing / taxi light with wig-wag function



Specification

Operating Voltage Range:	9-36VDC
Functions:	Landing / Taxi / Wig-Wag
Output Power – Landing:	10.2W
Output Power – Taxi:	5.4W
Input Current (at 25°C) – Landing:	0.41A @28VDC
Input Current (at 25°C) – Taxi:	0.22A @28VDC
Intensity (White Beam):	
<i>Narrow - Landing:</i>	40,000 cd
<i>Narrow - Taxi:</i>	20,000 cd
<i>Middle - Landing:</i>	18,000 cd
<i>Middle - Taxi:</i>	9,000 cd
<i>Wide - Landing:</i>	3,450 cd
<i>Wide - Taxi:</i>	1,725 cd
Beam Angle - Narrow:	7°
Beam Angle - Middle:	11°
Beam Angle - Wide:	27°
Ambient Temperature:	from -40°C to +85°C from -40°F to +185°F
Transient Voltage:	2 second +80V
Under-Voltage Lockout:	+9VDC, not more
Over-Voltage Lockout:	+36VDC, not less
Color:	White finish Black finish Chrome finish
Weight:	Approx 300 g / 10.58 oz
Waterproof, Dust-proof, Vibration-proof:	Yes
Pacifica I Narrow White	AVE-PF1NW-D01
Pacifica I Narrow Blue	AVE-PF1NB-D01
Pacifica I Narrow IR	AVE-PF1NI-D01
Pacifica I Middle White	AVE-PF1MW-D01
Pacifica I Middle Blue	AVE-PF1MB-D01
Pacifica I Middle IR	AVE-PF1MI-D01
Pacifica I Wide White	AVE-PF1WW-D01
Pacifica I Wide Blue	AVE-PF1WB-D01
Pacifica I Wide IR	AVE-PF1WI-D01

Dimensional Drawing

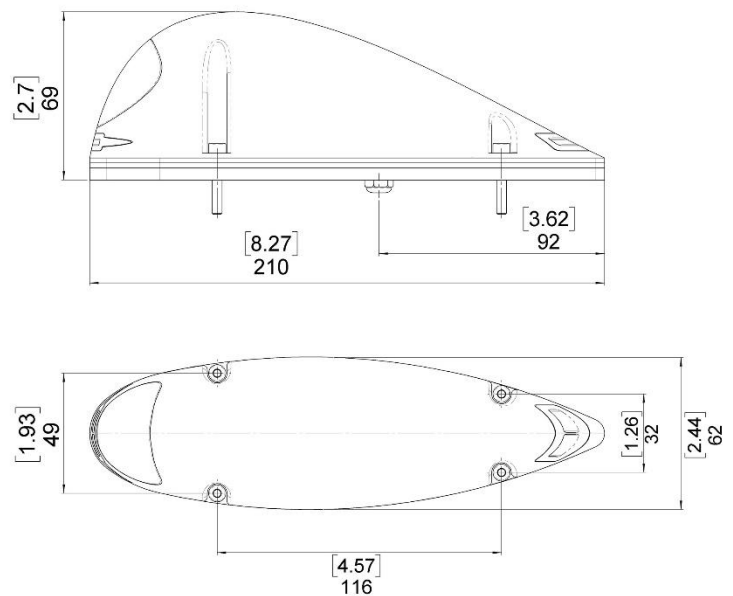

Dimensions in [inches] mm

Underwing or under fuselage landing / taxi light with wig-wag function

