

Pacifica NXT™


Under-wing or under-fuselage landing or taxi light



Specification

Pacifica NXT	AVE-PANTLW-D01
Pacifica NXT Landing (13°)	AVE-PANLW-D01
Pacifica NXT Taxi (35° x 13°)	AVE-PANTW-D01
Dimensions (mm):	140 x 62 x 45
Dimensions (inches):	5.52" x 2.43" x 1.76"
Operating Voltage Range:	9-36 VDC
Input Power:	13.16 W @14 VDC 13.16 W @28 VDC
Input Current (at 25°C):	0.94 A @14 VDC 0.47 A @28 VDC
Ambient Temperature:	from -40°C to +85°C from -40°F to +185°F
Overheat Protection:	Yes (temperature dependent decrement of intensity)
Transient Voltage:	1 second +90V
Under-Voltage Lockout:	+5.6 VDC, not more
Over-Voltage Lockout:	+37.8 VDC, not less
Weight:	180 g / 6.35 oz
Waterproof, Dust-proof, Vibration-proof:	Yes

Dimensional Drawing

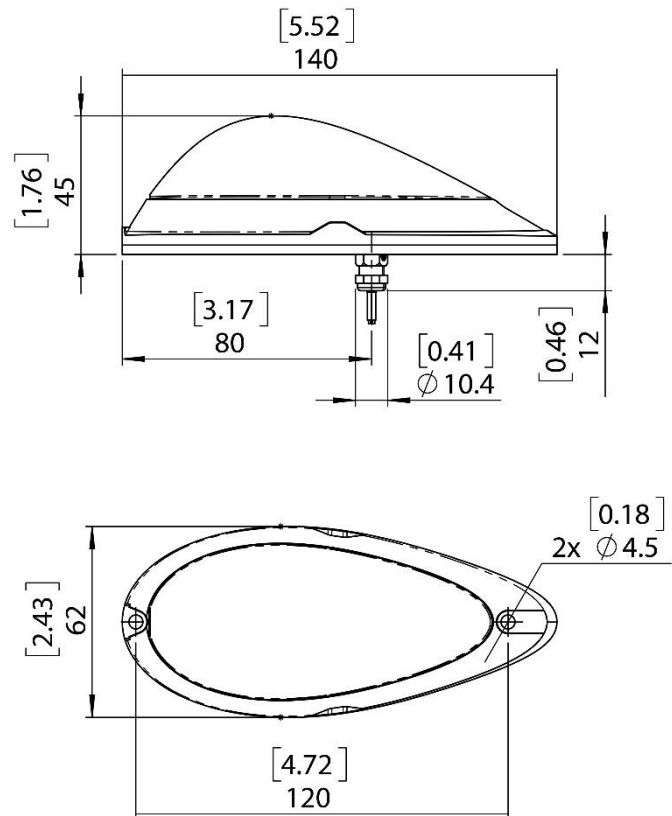

Dimensions in [inches] mm

Pacifica NXT™

Under-wing or under-fuselage landing or taxi light

Wiring Diagram

